


Engineering Data

EVEREADY NO. 206

*Zinc Chloride 9V
 No Added Mercury or Cadmium*

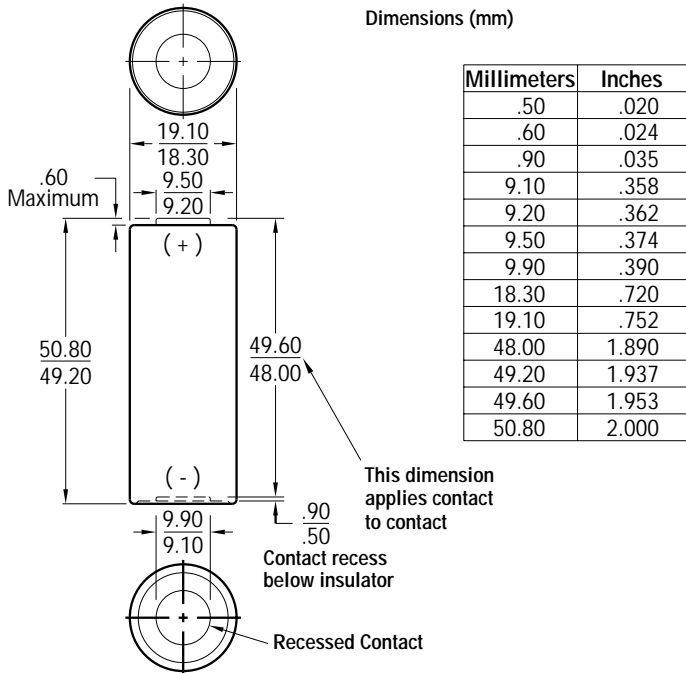


Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)

Designation: ANSI-1611
Battery Voltage: 9 Volts
Average Weight: 32 grams (1.1 oz.)
Volume: 14 cubic centimeters (0.9 cubic inch)
Average Service Capacity (to 0.8 Volt / cell): 200 mAh
 (Rated capacity at 25 mA continuous drain)
Cells: Six No. 110 in series
Jacket: Metal

TYPICAL DISCHARGE CHARACTERISTICS

Schedule: 4 hours/day
 Typical Drain @ 7.2V: 9.6 milliamperes
 Load: 750 ohms

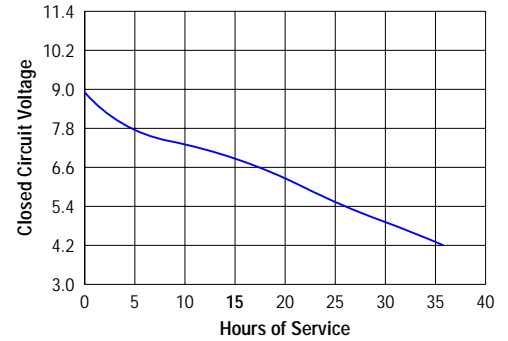

SIMULATED APPLICATION TESTS Estimated Average Service at 21°C (70°F)

Schedule	Typical Drains @ 7.2V (milliamperes)	Load (ohms)	CUTOFF VOLTAGE							
			4.2V	4.8V	5.4V	6.0V	6.6V	7.2V	8.4V	
4 hours / day	9.6	750	35.8	31.0	26.0	21.8	17.4	11.4	1.7	
4 hours / day	12.9	560	23.9	16.9	14.9	11.7	9.4	5.5	1.3	

IMPORTANT NOTICE

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.